




Smart Lotis 82 IP LED Warm Dim GE

124440XX_124441XX_124442XX


1





2

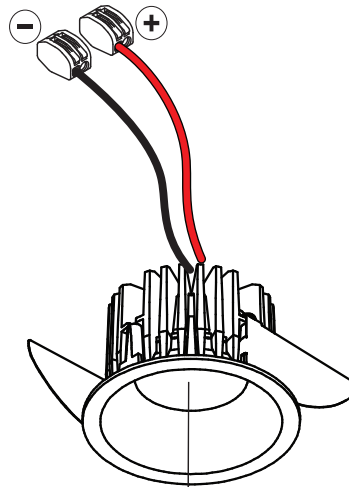


Drive Current (mA)	Forward Voltage		Power (W)
	min (Vf)	max (Vf)	
350	15,5	18,5	6
For serial connection, respect polarity!			
⊕ RED		⊖ BLACK	





 Replace protective shield when broken. The luminaire shall only be used complete with its protective shield. Reference number: 1010754


3


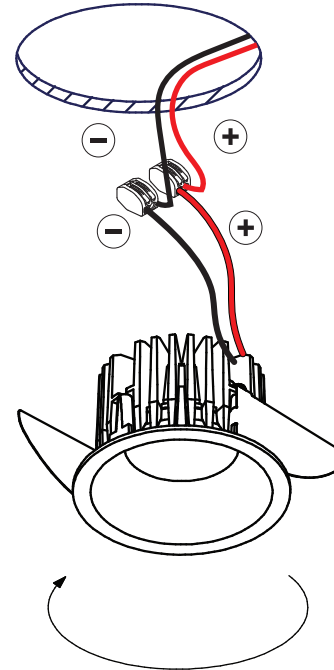


install : Twist clockwise
uninstall : Twist counterclockwise



 The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person

4

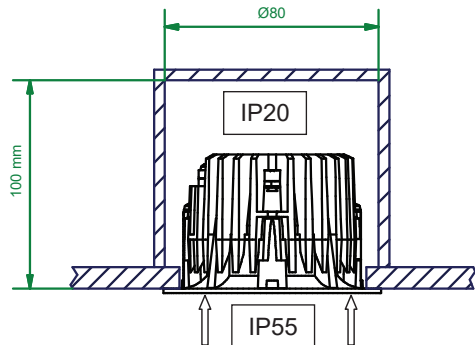

CAN BE USED WITH

Drivers:
 see driver matrix - latest version on website
www.supermodular.com or check sales contact

Gypkit - conbox
 12290130 Gypkit 190X190X Ø70
 10889830 Conbox outer dim. 190x192x130

Recessed ring:
 12500230 Recessed ring Ø70 H100

Mask:
 12500009 Smart Mask 82 1x WhStr
 12500032 Smart Mask 82 1x B1Str
 12500046 Smart Mask 82 1x Gold
 12500109 Smart Mask 82 2Lx WhStr
 12500132 Smart Mask 82 2Lx B1Str
 12500146 Smart Mask 82 2Lx Gold

