
ENNA WALL 7935

astro

SKU 1058056



PRODUCT SPECIFICATION

GENERAL

FINISH: Matt Nickel CABLE LENGTH: Not Applicable MAIN MATERIAL: Metal - Aluminium **GROSS WEIGHT:** 0.84 (Kg) H: 175mm W: 100mm D: 249mm **DIMENSIONS:** CLASS: CE (Class I) INSTALLATION ORIENTATION: Wall Mount - Horizontal IP RATING: IP20

CUT OUT HOLE: Not Applicable BATHROOM ZONE: Zone 3

RECESS DEPTH: Not Applicable VOLTAGE: Mains 230V

FIRE RATING: Not Applicable PRODUCT F MARK: Suitable for mounting on flammable materials

LAMP

LIGHT SOURCE:High Power LEDMACADAM ELIPSE:3-Step

MAXIMUM WATTAGE: 3W UGR: Not Applicable

MAXIMUM LAMP LENGTH: Not Applicable **BEAM ANGLE:** To Be Advised LAMP INCLUDED? Yes (Integral) TILT ADJUSTMENT ANGLE: 90 (Degrees) **LUMINOUS FLUX:** 116 (lm) ROTATION ADJUSTMENT ANGLE: 330 (Degrees) **COLOUR TEMP:** AVERAGE LIFESPAN: 2700 (K) To Be Advised CRI: L70: To Be Advised

R9: To Be Advised

ELECTRICAL

SWITCHED: SUPPLY FREQUENCY: Yes 50/60 (Hz) DIMMABLE: No DRIVER/BALLAST VOLTAGE: 100-240 (V) DIMMING METHOD: Not Applicable DRIVER AVERAGE LIFESPAN: 60,000 (Hrs) **DRIVER OUTPUT CURRENT:** 700 (mA) EFFICACY: To Be Advised

DRIVER OUTPUT VOLTAGE: Not Applicable DRIVER/BALLAST INCLUDED? Yes (Integral)


ADDITIONAL INFORMATION




BOX QUANTITY
To Be Advised

CE



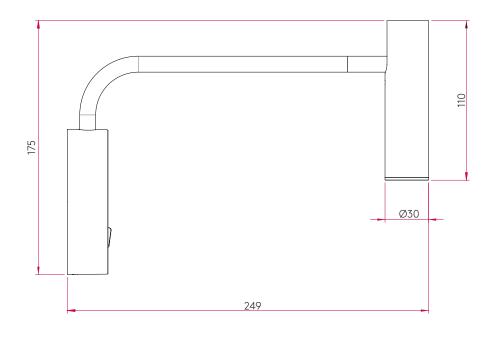

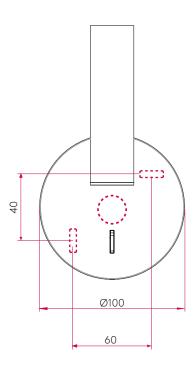

T: +44 (0) 1279 427001 F: +44 (0) 1279 427002 sales@astrolighting.com www.astrolighting.com