



SUSPENSIONS on track

1-PHASE

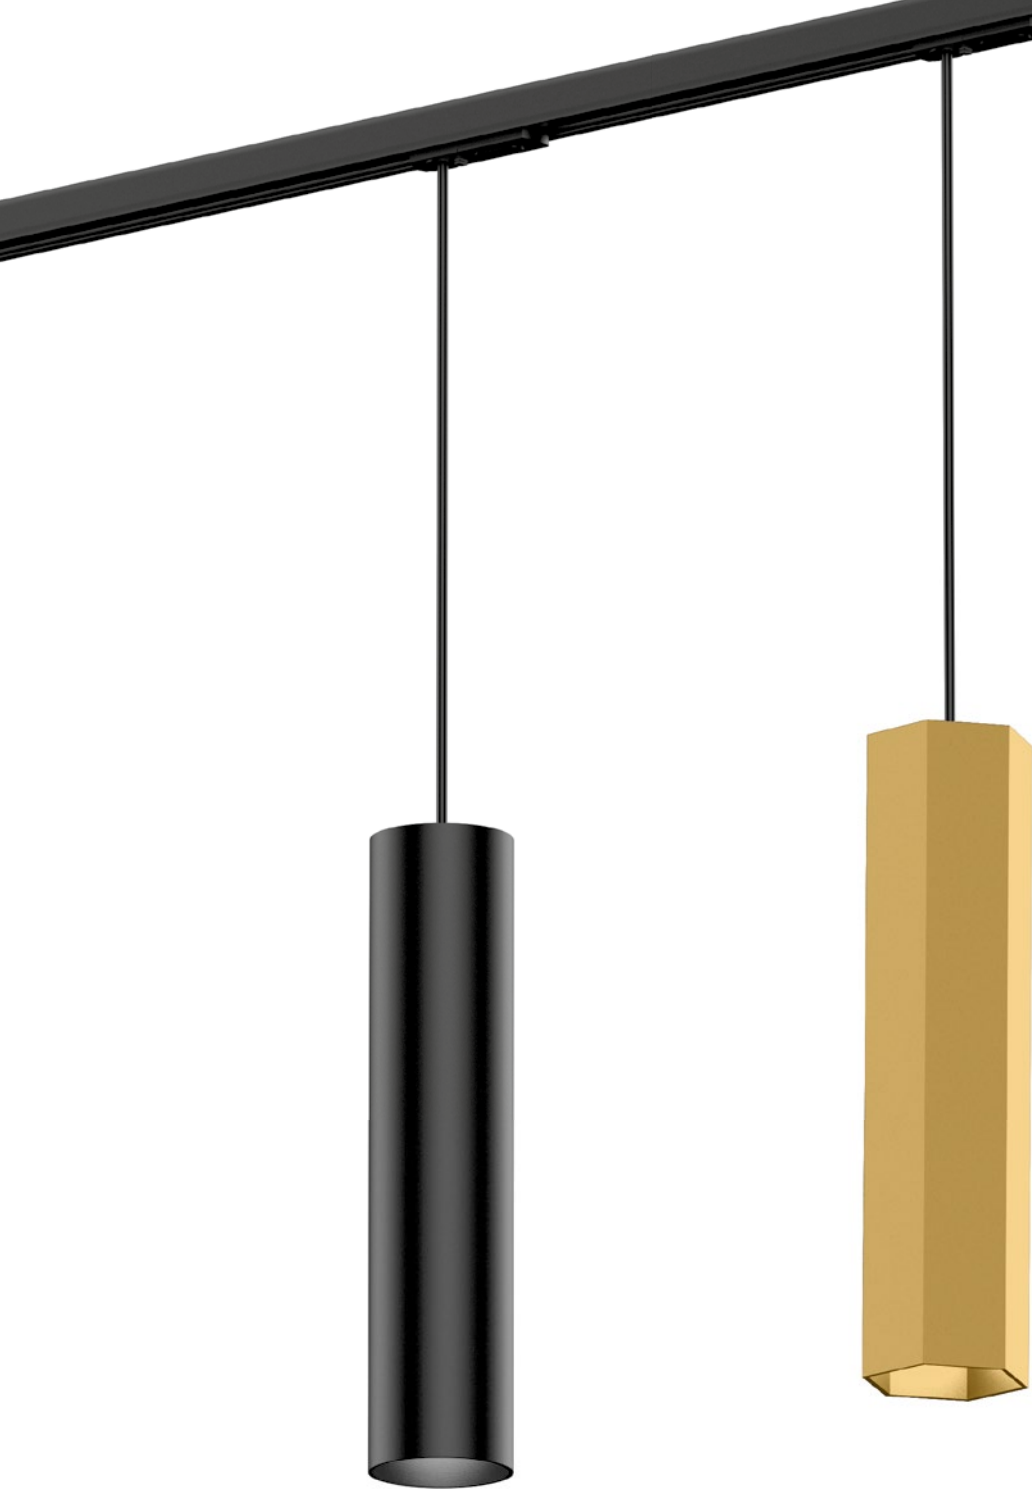

RAY 2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed | incl. 1-phase Global®
track adapter

0.62 | 0.76kg IP20 0.3° 36°


2.0

200mm	CODE
	217564W_
	217564L_
	217564G_
	217564P_
	217564B_

3.0

300mm	CODE
	217664W_
	217664L_
	217664G_
	217664P_
	217664B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	440	>90	5
1800-2850K	360	>95	9



RAY 2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed | incl. 1-phase Global®
track adapter

0.54 | 0.68kg IP20 0.3°

2.0

200mm	CODE
	217520W0
	217520L0
	217520G0
	217520P0
	217520B0


3.0

300mm	CODE
	217620W0
	217620L0
	217620G0
	217620P0
	217620B0

OPTIONAL

PAR16 LED GU10 7W phase-cut dim	
CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701



HEXO 2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim
aluminium powder coated
brushed | incl. 1-phase Global®
track adapter

0.66 | 0.82kg IP20 0.3° 36°


2.0

200mm	CODE
	215564G_
	215564Q_
	215564P_
	215564B_

3.0

300mm	CODE
	215664G_
	215664Q_
	215664P_
	215664B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	440	>90	5
1800-2850K	360	>95	9



HEXO 2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium powder coated
brushed | incl. 1-phase Global®
track adapter

0.58 | 0.74kg IP20 0.3°

2.0

200mm	CODE
	215520G0
	215520Q0
	215520P0
	215520B0

3.0

300mm	CODE
	215620G0
	215620Q0
	215620P0
	215620B0

OPTIONAL

PAR16 LED GU10 7W phase-cut dim	
CODE	
2700K	901228W2
3000K	901228W4
1800-2850K	901229S9

more lamps and specs on page 701