

FLOS

F0090023 Blue Steel Anodized

Aim

Designed by Ronan & Erwan Bouroullec, 2013




16W - 895lm - 2700K - CRI> 90

Suspended light fitting. Body in varnished aluminium sheet, shade in photo-etched optical polycarbonate. Internal reflector in photo-etched ABS. Orientable body. Powered directly from mains. The LED can be dimmed with a «Triac for Led» dimmer approved by Flos. Flos does not respond in case of wrong electrical connection system installations. The cable has a useful length of 9 meters and thus the lamp can be suspended 3 meters from the ceiling. Multiple rose with capacity to connect up to 5 Aims also available.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



Main specifications

EAN	8059607013274
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	16
System power (W)	16
System flux (lm)	895

Physical

Colour	Blue Steel Anodized
Length (mm)	243
Net weight (kg)	3.2
Package height (mm)	375
Package width (mm)	300
Package length (mm)	300
Package volume (m3)	0.03
IP internal	20

Download

Mounting instructions	↓ PDF
Compatible dimmers	↓ PDF
Spare Parts	↓ PDF

Photometric Files


LDT / IES	↓ LDT
-----------	-------

Technical Drawings

2D	↓ ZIP
3D	↓ ZIP
Bim	↓ ZIP



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2700
CRI>	90

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimmable	Yes
Dimming type	Mains Cut Dimming
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only)
light source by a
professional

Accessories & Power Supply



OPTIONAL

F0093030

Aim Multiple Canopy




OPTIONAL

RF22227

Aim Dimmer

Spare Parts

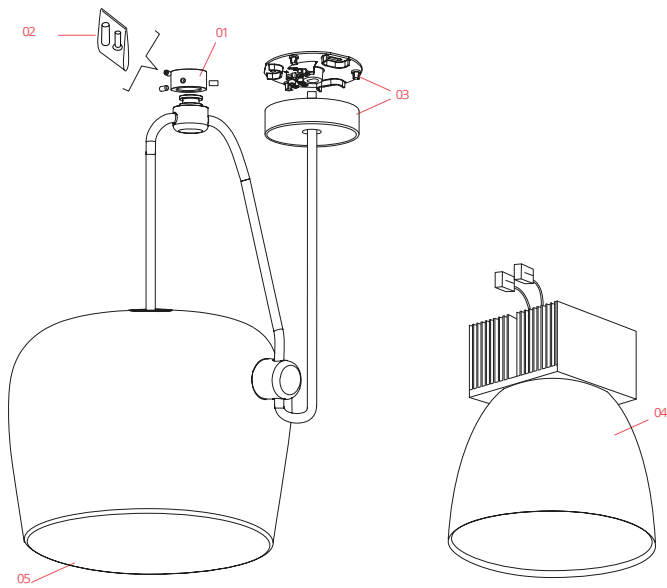

- | | | |
|-----|---|-----------|
| 01. | Dark grey/steel blue ceiling attachment assembly | RF0090123 |
| 02. | Kit of quantity 3 m4 screws | RF06750 |
| 03. | Black ceiling rose assembly | RF0090230 |
| 04. | Aim Heatsink, 2700K Led Module & Reflector Assembly | RF0090700 |
| 05. | Aim opal diffuser | RF0090600 |

DOWNLOAD



RF0090123

Dark grey/steel blue ceiling attachment assembly



RF06750

Kit of quantity 3 m4 screws



RF0090230

Black ceiling rose assembly



RF0090700

Aim Heatsink, 2700K Led Module & Reflector Assembly



RF0090600

Aim opal diffuser