

# FLOS

08.8595.06A Chrome

## Junco 250 mm



Luminaire that offers many possibilities. Can be individually focused and their recessed height is adjustable.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications


Mounting	Ceiling recessed
Environments	Indoor dry location
LED type	Power LED
Lamp category	LED
Ilcos	No
Power (W)	2.2
Source flux (lm)	182
System flux (lm)	130

### Physical

Colour	Chrome
Trim	No
Orientation	Adjustable
Rotation (°)	360
Longitudinal tilting (°)	20
Recessed depth (mm)	210
Length (mm)	250
Net weight (kg)	0.13
IP internal	20
IP external	20

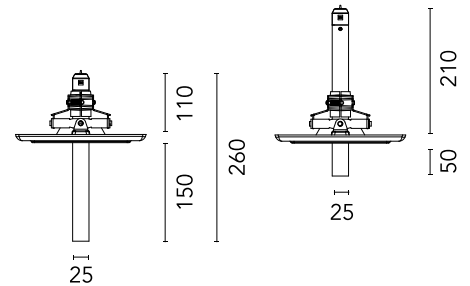

### Download

[Mounting instructions](#)  PDF

### Photometric Files

[LDT / IES](#)  LDT

### Technical Drawings

[2D](#)  ZIP

[3D](#)  ZIP



## Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
Beam angle C0-180 (°)	15

## Electrical

Main voltage (Vac)	3.00
Driver	Remote excluded
Dimmable	No
Dimming type	Non Dimmable, Dimmable Push, Dimmable 1-10V
Emergency type	No

## Notes

Soft Plate to be order separately.

---

## Accessories & Power Supply



### OPTIONAL Power supply

Electrical

60.8911

Non dimmable continuous current power supply of 15-20W, 110/240V - 50/60Hz, with power current selected through adjustable 350 mA-15W /500 mA / 550 / 700 / 850 mA / 900 mA - 20W switch



### OPTIONAL Power supply

Electrical

60.9188

Continuous current power supply of 13-20W, 110\*/240V - 50/60Hz with power current selected through adjustable 200 mA - 13W / 300 mA - 15W / 350 mA - 18W / 400 / 450 / 500 / 550 / 600 / 650 / 700 / 750 / 800 / 850 / 900 mA - 20W. switch. 0/1-10V or push...



### OPTIONAL Power supply

Electrical

60.9222

Continuous current power supply of 12-20W, 110/240V - 50/60Hz with power current selected through adjustable 250mA - 12W / 350mA - 17W / 400mA - 19W / 450 / 500/ 550 / 600 / 700mA - 20W regulable Dali 1 & Dali 2



### OPTIONAL Power supply

Electrical

60.9592

Non dimmable continuous current power supply. 15-30W, 220/240V -50/60Hz with power current selected through adjustable switch. 350mA - 15W / 400mA - 17W / 450mA - 19W / 500mA - 22W / 550mA - 24W / 600mA - 26W / 650mA - 28W / 700mA - 30W.



### OPTIONAL Power supply

Electrical

60.9716

Continuous current power supply 26W, 220/240V - 50/60Hz current selected through switch. Dimmable Casambi. 700mA - 25.9W / 600mA - 25.8W / 500mA - 26W / 350mA - 18.2W / 300mA - 15.6W / 250mA - 13W / 200mA - 10.4W / 150mA - 7.8W



### OPTIONAL Power supply

Electrical

60.9692

30W, 220-240V - 50/60Hz Constant current power supply, with dip-switch programmable power supply current.

