
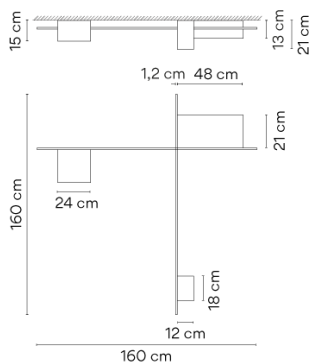


2647

Design By Arik Levy

Ceiling light where different cubic volumes meet or expand to provide flexible solutions, maintaining spatial order.

Model Sheet

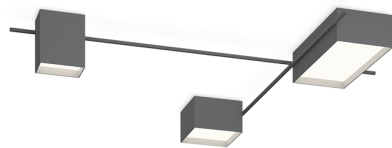

Finish


- 15 Grey L2
NCS S 2500-N
- 21 Black Grey
NCS S 7000-N

LED temperature color 3000 K / 3500 K / 4000 K

Dimming DALI / CASAMBI / 1-10V



Installation type Surface Canopy





Materials Body: Aluminum
Diffuser: Polycarbonate
Profile: Aluminum

LED  CRI>90
3000 K / 3500 K / 4000 K

Driver Constant Voltage 110-240 V V
50-60 Hz HZ

Remarks Main input by the biggest box

  **Dimmable** **LED**

    **IP20** **Bi-volt** **50-60Hz** **1-10V**


Application Ceiling Lamps

Packaging 4 Box
0.38 m x 0.61 m x 0.22 m
Gross weight 13.1
Net weight 10.35
Vol. 0.1148

Lighting effect

General Lighting


Lamp for general lighting with an opaque shade and distributing light upwards and/or downwards mainly.



Photometric Data

Efficiency 69.34 lm/W
Coordinate System CG
Total Flux 5200.43 lm
Maximum Value 2251.45 cd

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com