

FLAT MOON 650 CEILING DOWN LED DALI/PUSHDIM GI


Contemporary architectural projects love a minimalist, slim lighting design. Flat moon is a stylish, reduced height fixture (78 mm) that distributes a soft, yet functional light. Office-compliant when combined with one of the prismatic diffusers, it is also a perfect fit for public spaces, hotels, restaurants or retail environments. Exceptionally versatile, Flat moon can be either surface-mounted, recessed or suspended (with two types of suspension kits for either down or up/down lighter) and even directly mounted and connected onto the gear. It comes in three sizes: 450, 650 or 950 mm diameter.

Art. Nr. 13292509

SPECIFICATIONS

Gear / Transfo	LED gear incl.
Weight	10.7kg
Min. distance	0.1 m
Power supply	230V
IP	IP20
Glow wire test	650°
Lifetime	L80 B20 @ 50.000 hrs
CRI	90
CIE flux code	47/78/95/100/80
Lumen	7077 Lm
Efficacy	101 Lm/W
UGR	24
Adjustability	Not Applicable

Available label
<http://supemodular.com/assets/TYPE2.pdf>

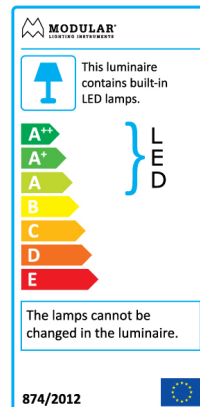

	WARM WHITE 2700K / CRI 90+	WARM WHITE 3000K / CRI 90+	WARM WHITE 4000K / CRI 90+
black struc	13292332	13292432	13292532
white struc	13292309	13292409	13292509

