TARO TWIN FIRE-RATED 5710

astro



PRODUCT SPECIFICATION

GENERAL

SKU 1240032

FINISH:Painted WhiteCABLE LENGTH:Not ApplicableMAIN MATERIAL:Metal - AluminiumGROSS WEIGHT:1.054 (kg)DIMENSIONS:H: 210mm W: 100mm D: 150mmCLASS:CE (Class I)

 INSTALLATION ORIENTATION:
 Ceiling Mount Only
 IP RATING:
 IP20

 CUT OUT HOLE:
 H: 91mm W: 85mm
 BATHROOM ZONE:
 Zone 3

RECESS DEPTH: 155 (mm) VOLTAGE: Mains 230 (V)

FIRE RATING: 90 (min) PRODUCT F MARK: Not Suitable for mounting on flammable materials

LAMP

LIGHT SOURCE: GU10 MACADAM ELIPSE: Not Applicable MAXIMUM WATTAGE: 50W Max UGR: Not Applicable MAXIMUM LAMP LENGTH: 56 (mm) **BEAM ANGLE:** Lamp Dependant LAMP INCLUDED? No **TILT ADJUSTMENT ANGLE:** 15 (Degrees)

LAMP INCLUDED?NoTILT ADJUSTMENT ANGLE:15 (Degrees)LUMINOUS FLUX:Lamp DependantROTATION ADJUSTMENT ANGLE:360 (Degrees)COLOUR TEMP:Lamp DependantAVERAGE LIFESPAN:Lamp DependantCRI:Lamp DependantL70:Not Applicable

ELECTRICAL

R9:

SWITCHED:NoSUPPLY FREQUENCY:Not ApplicableDIMMABLE:YesDRIVER/BALLAST VOLTAGE:Not ApplicableDIMMING METHOD:Lamp DependantDRIVER AVERAGE LIFESPAN:Not Applicable

Lamp Dependant

DRIVER OUTPUT CURRENT:Not ApplicableEFFICACY:Lamp DependantDRIVER OUTPUT VOLTAGE:Not ApplicableDRIVER/BALLAST INCLUDED?Not Applicable


ADDITIONAL INFORMATION


Not suitable for mounting in a brick/solid wall. Not suitable for covering with thermal insulation.




BOX QUANTITY X12

Œ

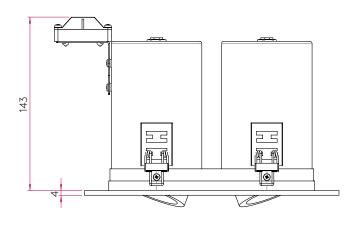



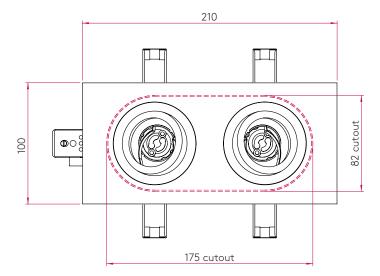

Astro Lighting Ltd. G2 River Way, Harlow, CM20 2DP, Great Britain

Issue 1 / 19.01.16

T: +44 (0) 1279 427001

F: +44 (0) 1279 427002

sales@astrolighting.co.uk

www.astrolighting.co.uk