

# FLOS

■ F1369030 Glossy Black

## Smithfield Suspension Pro dimmable DALI

Designed by Jasper Morrison, 2009



45W - 2791lm - 2700K

Suspension lamp with direct light. Aluminium body. Available in gloss black, white, matt black, green, red or MUD. Injection-moulded opalescent methacrylate diffuser. Steel ceiling attachment with steel suspension cable, 5 pole electric cable in PTFE double insulation, working length 2700 mm. Control DALI dimmable.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

EAN	8059607015131
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	45
System flux (lm)	2791

### Physical

Colour	Glossy Black
Length (mm)	600
Cord length (mm)	2700
Canopy dimension (mm)	36
Canopy width (mm)	146
Net weight (kg)	5.8
Package height (mm)	310
Package width (mm)	710
Package length (mm)	710
Package volume (m3)	0.16
IP internal	20

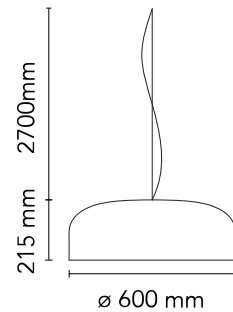

### Download

[Mounting instructions](#) PDF

[Spare Parts](#) PDF

### Photometric Files

[LDT / IES](#) LDT

### Technical Drawings


[2D](#) ZIP

[3D](#) ZIP

[Bim](#) ZIP



## Schematic light drawing



Luminous flux Luminaire  
2623 lm

## Photometric


Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2700

## Electrical


Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	200-240
LED voltage Vf (Vdc)	null
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F




Replaceable (LED only)  
light source by a  
professional



Replaceable control  
gear by a professional

## Spare Parts

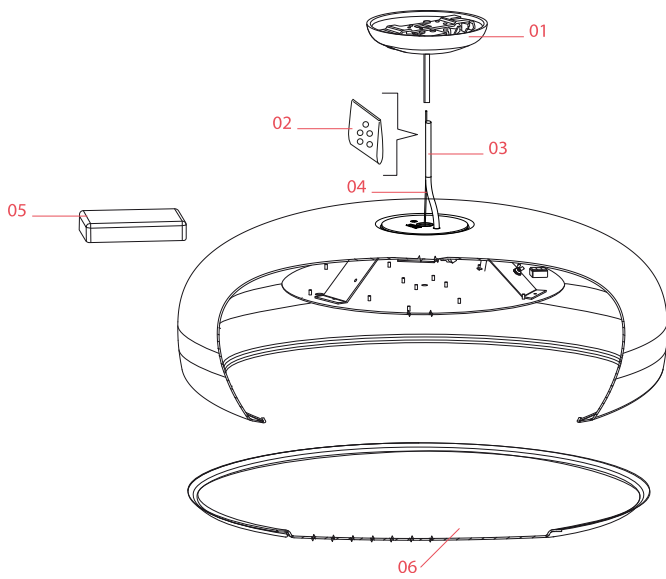

- |     |  |           |
|-----|--|-----------|
| 01. | Black rose assembly                        | RA3690230 |
| 02. | Kit of 5 or rings                          | RF05382   |
| 03. | 2,7mt fep/pvc 5x0,75 transparent cable     | RF29934   |
| 04. | 3 mt steel cable ø1,2 with 19 winded wires | RF29665   |
| 05. | Driver 60W 500-1400mA 200-240V             | RF31674   |
| 06. | Methacrylate diffuser                      | RF19022   |

**DOWNLOAD**

RF29934

2,7mt fep/pvc 5x0,75 transparent cable



RA3690230

Black rose assembly

RF05382

Kit of 5 or rings

RF29665

3 mt steel cable  $\varnothing$ 1,2 with 19 wined wires



RF31674

Driver 60W 500-1400mA 200-240V

RF19022

Methacrylate diffuser